


# ICE® MODEL D62-22

## DIESEL PILE HAMMER



Simple, reliable design  
Automatic lubrication  
Optional variable fuel control  
Optional hydraulic trip

Equipped with ICE® Box leads guides  
Uses standard ICE® drive caps  
Swinging, fixed and sliding leads available  
Spotters available for precise pile positioning

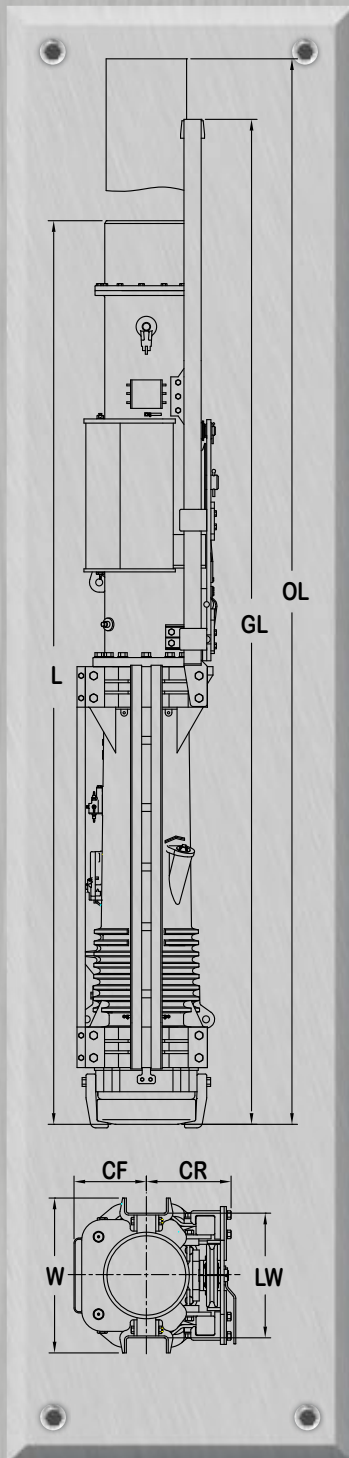

### Working Specifications

Ram weight	13,670	lbs	6 200	kg
Rated energy (fuel setting 4)	161,640	ft-lbs	219 200	Nm
Stroke at rated energy (fuel setting 4)	11.8	feet	3 600	mm
Energy at fuel setting 3	134,160	ft-lbs	181 900	Nm
Energy at fuel setting 2	107,490	ft-lbs	145 700	Nm
Energy at fuel setting 1	79,200	ft-lbs	107 400	Nm
Energy at maximum stroke	204,400	ft-lbs	277 100	Nm
Maximum geometric stroke	14.9	feet	4 560	mm
Blows per minute	36-50			
Maximum batter without extension	1:2			
Maximum batter with extension	1:1			

### Weights

Bare hammer with trip	28,000	lbs	12 700	kg
Hammer with box lead guides	30,450	lbs	13 810	kg
Drive cap base	DCB-2HD			
Drive cap base weight	1,670	lbs	758	kg
Striker plate	845	lbs	383	kg
Cushion material	134	lbs	61	kg
Pile insert	DCC-16			
Pile insert weight	1,260	lbs	572	kg
Operating weight with drive cap above	34,359	lbs	15 584	kg

### Capacities

Fuel tank	26	gal	98	l
Lube oil tank	8.3	gal	31.5	l

### Dimensions

Hammer length (L)	22.8	ft	6 925	mm
Length with trip guides (GL)	24.5	ft	7 465	mm
Length at max stroke (OL)	30.3	ft	9 215	mm
Width, usually trip (TW)	36	in	902	mm
Standard box leads width (LW)	32	in	812	mm
Overall depth (CR + CF)	45.5	in	1 156	mm
Centerline to rear (CR)	20.0	in	508	mm
Centerline to front (CF)	25.5	in	648	mm

DH-D62-22-Mar 2012

# INTERNATIONAL CONSTRUCTION EQUIPMENT, INC.

Corporate offices: 301 Warehouse Drive, Matthews, NC USA  
Phones: 888 ICEUSA1, 704 821-8200

info@iceusa.com  
www.iceusa.com